



STONCO FLANKING LIGHT FIXTURES



LISTED for
Wet Locations



4600E

Power Beam Series Floods

up to 1000 watts

CONSTRUCTION

Precision die-cast aluminum with heat dissipation. Fully adjustable 1/2" male NPS arm. Units are pre-wired with porcelain socket and silicone gasketed for weather resistance. Enclosed units equipped with shock and heat resistant tempered glass. Open units used outdoors must be aimed below horizontal.

LAMP


(Not supplied.) Accepts up to 1000 watt PAR46, PAR56 or PAR64 depending on model.

PRODUCT SPECIFICATIONS APPLICATIONS

All of the advantages of incandescent such as instant-on and excellent color rendition combined with bright wattage and tight beam control. Ideal for long throw applications such as billboards, flags and emblems as well as accent lighting. Enclosed units can be aimed above horizontal.

ORDERING INFORMATION

Catalog No.	Watt	Lamp	Base	Weight	Price
OPEN UNITS					
6400	500	PAR64	Mogul end prong	6lbs	\$162.00 ea.
ENCLOSED UNITS					
6400E	500	PAR64	Mogul end prong	7lbs.	\$146.00ea.
Q6400AH	1000	PAR64	Mogul end prong	9lbs	\$540.00ea

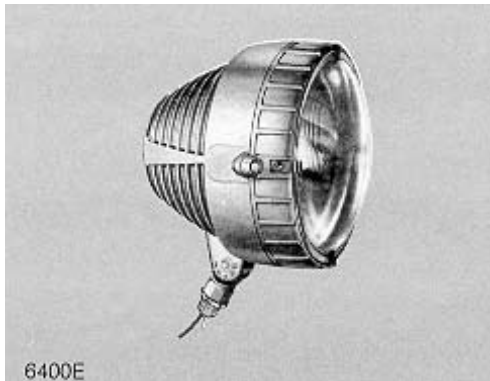

6400E

ACCESSORIES

The following are field installed accessories. Order by Cat. No.

- For all PAR-46, PAR-56 Units:
Incandescent, Tungsten
Halogen (Quartz)
Clear lens and mounting kit5652T
Clear lens only (79/16" dia.)6653T
Wire guard5650
Cast glare shield: 1800.....5651
Cast full shield: 360156512

DIMENSIONS (inches)

Series	A	B	C	D	E
6400E	9 1/8	4 1/2	2 3/4	5 1/2	9



- SURFACE ADAPTER:** To convert 1/2" arm to surface mount.....SLW10
For all PAR-64 Units: Incandescent, Tungsten Halogen (Quartz) **\$18.00**
Wire guard
Glare shield: 270
For PAR-64 Units: Incandescent
Clear lens and mounting kit6452T
Clear lens only (8" dia.)6453T
For PAR-64 Units: Tungsten Halogen (Quartz)
Clear lens and mounting kit06452T
Clear lens only (8" dia.)06453T
Clear above-horizontal lens only....064S3AH